


# 2' x 2' Passive Ceiling Enclosure for Patch Panels A1222-PP

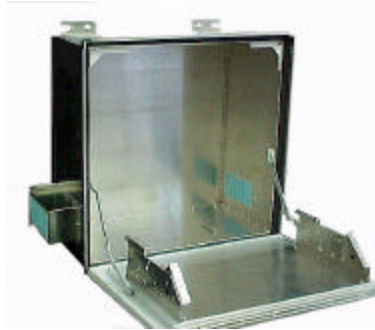

## Description:

This plenum-rated Zone Cabling Termination Cabinet mounts in a 2' x 2' ceiling tile grid system. It houses standard 19-inch rack-mountable hardware with a capacity of (2) 48-port patch panels with wire management, or any combination of connectivity, allowing a total of 5 rack units per enclosure. This assembly includes the doorplate, equipment mounting assembly, and fire-rated foam kits.

## Specification:

Height	12"	Width	24"	Length	24"
Weight	38 lbs	Door Weight Capacity	25 lbs	Total Weight Capacity	75 lbs

**Door type:** Continuous hinge, swing down. Key locks available.

**Cable Entry/Exit:** (2) 6 inch x 3 inch openings with approved fire-rated foam kits.

**Equipment mounting assembly:** Mounted on door, compatible with all 19-inch patch, punch-down panels, or any combination of rack-mountable connectivity for copper, fiber, and coax terminations.

**Materials:** *Enclosure* - .060 Aluminum *Foam kit* – Polychloroprene latex compound

**Packaging:** 1 carton / package

**Approvals:** UL File Number / E185147

Specifications are subject to change without notice.

Revised 8/01

In the U.S. 1-800-285-2070  
www.aatk.com  
E-mail: service@aatk.com